




Innovative Solutions for Gardeners Everywhere!®

Assembly Manual

© 2016 GRO Products All Rights Reserved


Vertical GRO Arbor

Vertical GRO Arbor Slats Detail

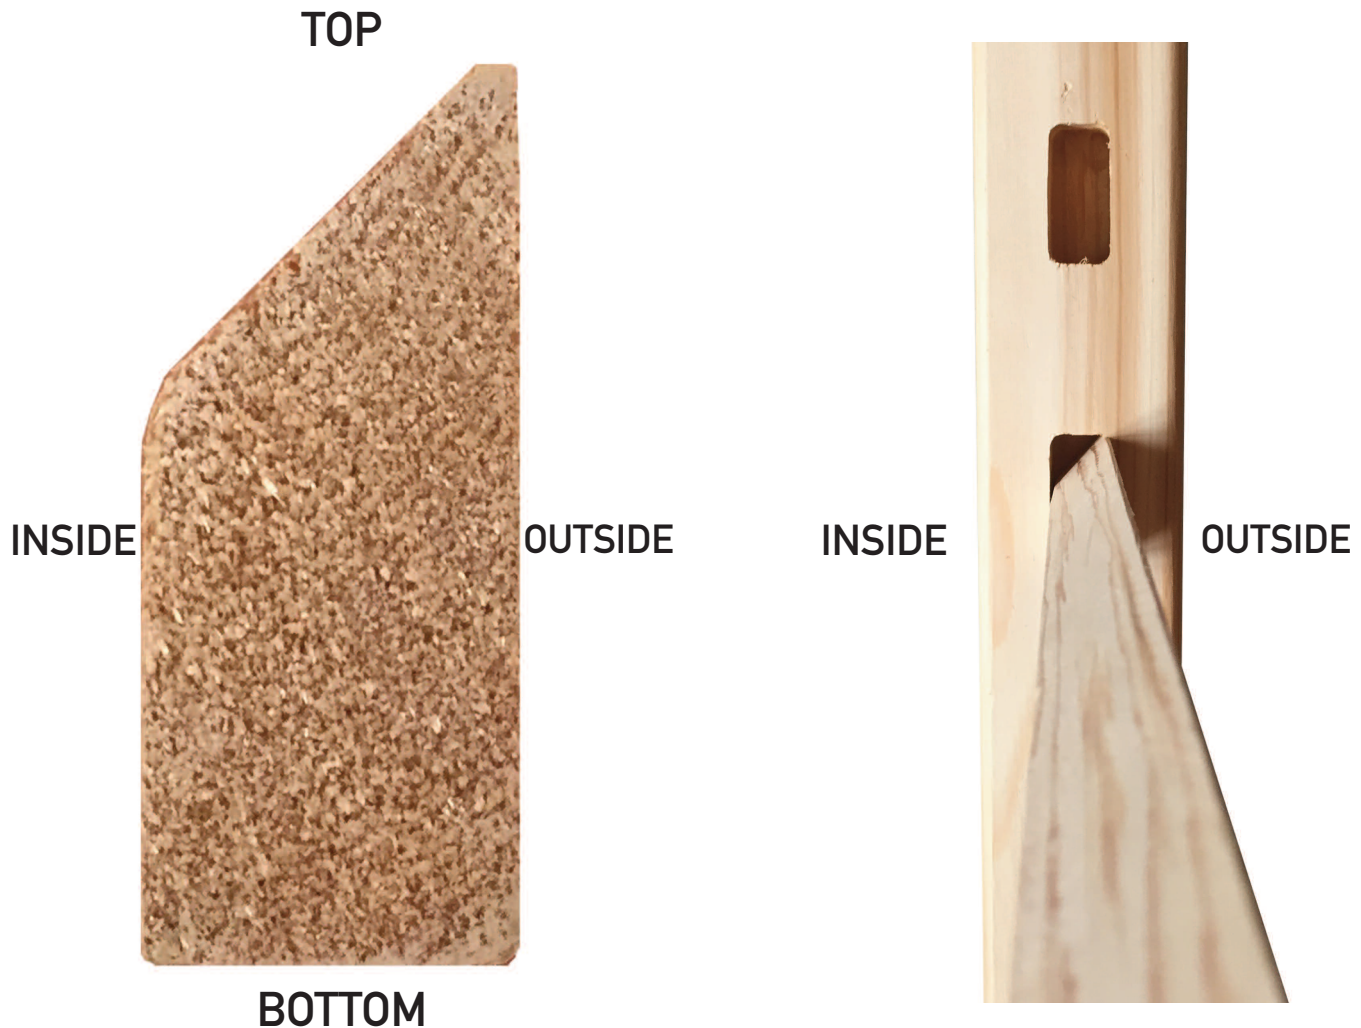

While assembling your Vertical GRO Arbor on a flat surface, the flat (OUTSIDE) side of the slats will always be facing up. The point (TOP) of the slat will always point TOWARDS the HEADER (part with GRO Products logo) & the notched portion of the POSTS.

1.

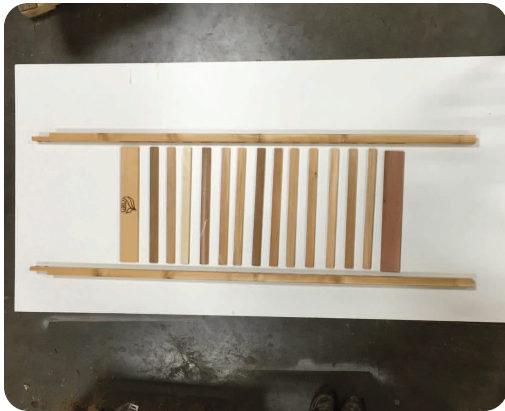

To start assembly of the sides of your VGA, lay out the posts, slats, header and footer on a flat surface as shown above. Make sure you keep the notched portion of the post to the outside. The flat side of all the slats **MUST** be facing up, the same way as the logo on the Header & the angled edges must be pointing up, towards top of the posts (the notched ends.)

2.




Insert the Header, the Slats and the Footer as far as they will go into the grooved slots on one post.

3.




Next, gently slide the Header, Slats & Footer into the other post, keeping the second post stationary and keeping the Header, Slats & Footer in the previous grooved slots. If done correctly, the Header, Slats & Footer should be half way in the grooved slots on either post.

4.

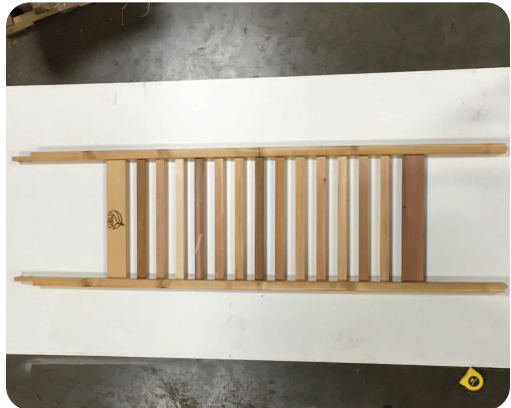


Using another person, push both posts toward each other until the Header, Slats & Footer are all the way in the grooved slots on both posts.

5.

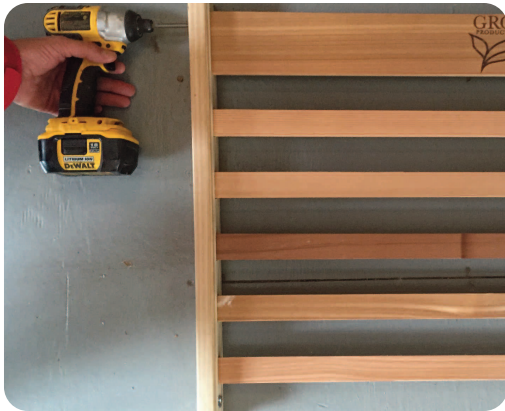


Using a screwdriver or power drill/driver, attach the Header, Slats & Footer to both posts, using the provided screws through the pre-drilled holes. REPEAT STEPS 1-5 FOR THE OTHER SIDE OF YOUR VGA.

6.

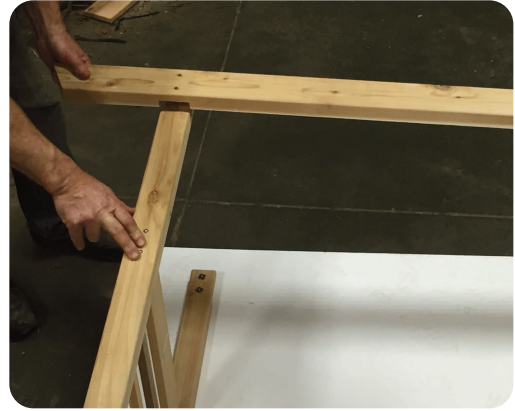

Put the sides of your VGA on their sides and then put the Rafters on the notched portion on the top of the posts. The Rafters & Posts should inter-lock and the pre-drilled holes should line up.

7.

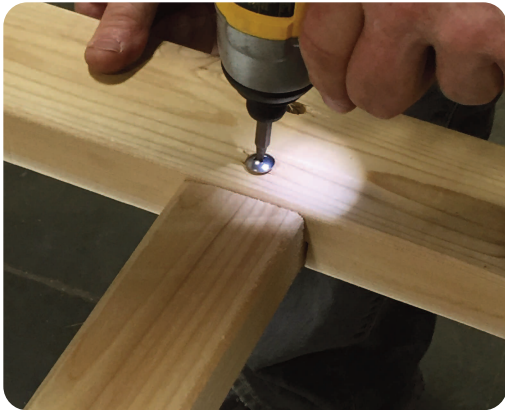

Using a screwdriver or power drill/driver, attach the Rafters to the Posts using the provided bolts through the pre-drilled holes. Once you have attached both bolts on both rafters, flip your assembly over and repeat steps 8 & 9.

8.



Your VGA assembly should now look like this.

9.



Place the corner Brackets on the inside of the Rafter & Post connection as shown above, making sure that the flat portions of the Brackets are flush with the flats of the Rafters & Posts. Attach the Bracket to the Rafter using the provided screws through the pre-drilled holes.

10.




Attach the Bracket to the Post using the provided screws through the pre-drilled holes. REPEAT STEPS 7 & 8 FOR ALL FOUR RAFTER TO POST CONNECTIONS.

11.



Lay the Purlins on top of the Rafters. There are pre-marked Xs denoting where the Purlins should go on top of the Rafters. Make sure the pre-drilled holes on the Purlins line are also centered on the Rafters

12.

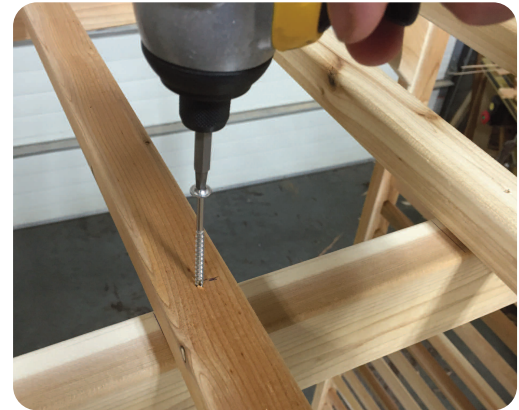

Attach the Purlins to the Rafters using the provided screws through the pre-drilled holes.

13



Now that your VGA is assembled, place the plastic liners into the wooden boxes and then hang them on your VGA walls.

14.



You are now ready to fill the planter boxes of your VGA with soil and plant your favorite flowers, herbs & vegetables.